

Made in America

Lifetime Guarantee



Thank you for purchasing this instrument from Intellitronix. We value our customers!


INSTALLATION GUIDE

Triple Gauge Set

With Bezel

Part Number: M9333

***Always disconnect the battery before attempting any electrical work on your vehicle. ***

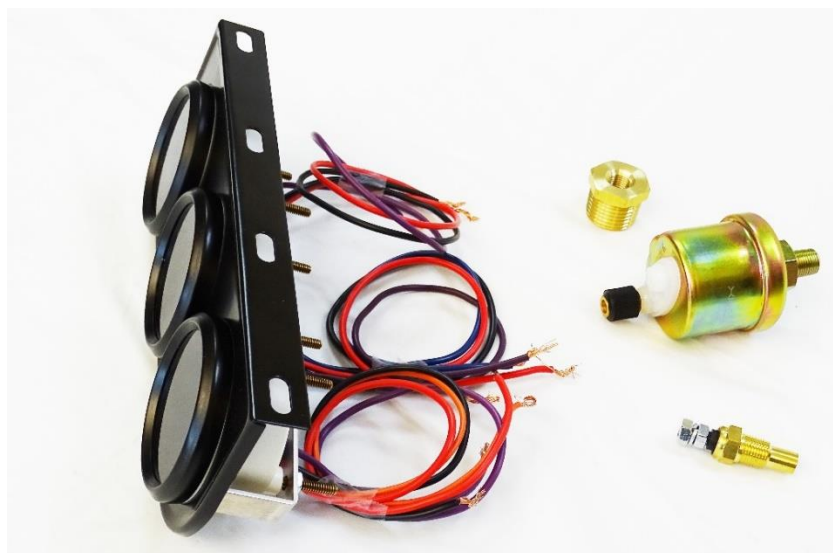

Ground – Black--This is the main ground for the display system. A wire should be run from this board to the vehicle engine block for the best ground. Use 18 AWG or larger wire to ensure enough grounding. Proper vehicle grounding is extremely important for any gauges (or electronics) to operate correctly. The engine block should have heavy ground cables to the battery, frame, and firewall. Failure to properly ground the engine block, senders, or digital dash can cause incorrect or erratic operation

Battery Red--Connect the +12 Volt terminal to constant +12V power from the battery. Use 18 AWG wire to ensure the system receives enough power feed

Dimmer – Purple Connect to the parking lights to dim the LEDs 50% when the headlights are on. However, ***DO NOT *** connect to the headlight rheostat control wire, or the dimming feature will not work properly and may cause damage to Unit.

Water Temperature Gauge – Blue - This gauge is incompatible with other sending units, so you must replace the existing water temperature sending unit with the included sender.

Note: Automotive wire connectors are the preferred method of connecting wires. However, you may solder if you prefer.


Note: Gauge has a maximum temperature reading of 255 degrees, Fahrenheit.

Connect the **Black** This is the main ground for the display system. A wire should be run from this board to the vehicle engine block for the best ground. Use 18 AWG or larger wire to ensure a sufficient ground. Proper vehicle grounding is extremely important for any gauges (or electronics) to operate correctly. The engine block should have heavy ground cables to the battery, frame, and firewall. Failure to properly ground the engine block, senders, or digital dash can cause incorrect or erratic operation.

Connect the **Blue** wire to the temperature sending unit. To avoid inaccurate readings, **do not** use Teflon tape or other sealer on the new sending unit's threads. Connect the blue wire to the sending unit.

Oil Pressure Gauge – Orange Reuse the existing oil pressure sending unit with the unit included. **Do not** use Teflon tape or other sealer on the new sending unit's threads. This will avoid inaccurate ground connections as the sending units get their ground from the threads. The oil sender gets its ground from the threading into the engine block, thus proper grounding is crucial. Connect to the sending unit

PRESSURE SENDING UNIT:

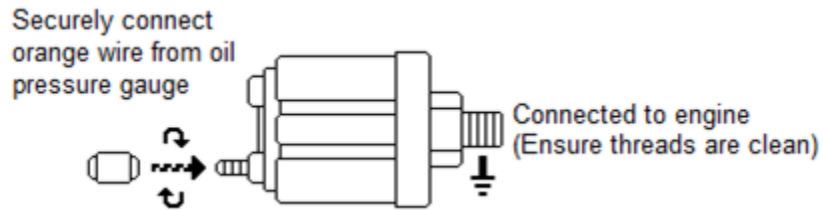

MAKE SURE that the connection between the oil pressure sensor and the engine is clean and **DOES NOT** have Teflon tape or any other sealant on the threads. This provides a ground for the sensor which will not function properly if inhibited.

MAKE SURE to test all fittings and connections for leaks. If any leaks are detected, determine the cause and repair immediately. **DO NOT** operate vehicle if any leaks are detected.

NOTE: Gauge mounts in a 2-1/16" hole. Use supplied brackets and nuts to secure gauge to dash. Sender features a 1/8" NPT male fitting and should automatically be grounded when grounded to engine block.

Voltmeter Gauge – Uses the **RED** ignition wire to determine your voltage.

TROUBLESHOOTING

To ensure your device is working properly, it can be temporarily connected directly to the battery. Connect the **RED** wire to the positive terminal and the **BLACK** wire to the negative terminal.

This device **WILL NOT** function properly without a steady +12V source. if possible, use a multimeter to test the selected +12V source to ensure that it meets this requirement.

Once connected the device should read "00" provided that the **ORANGE** wire is not touching anything. If you then touch the **ORANGE** wire to ground, the gauge should count upwards.

The **PURPLE** wire will dim the gauge when connected to +12V. If you would rather it stay at maximum brightness, attach it to ground. If you would like the gauge to dim when you turn on your headlights, attach the **PURPLE** wire to your headlight switch.

Technical Support



Monday – Friday

9am to 5 pm EST

(440) 359 7200

support@intellitronix.com

CHECK OUT THE **SUPPORT** PAGE AT

www.intellitronix.com

FOR QUICK ANSWERS (**Q&A**) TO YOUR QUESTIONS



This product carries a limited Lifetime Warranty.

This warranty is limited to replacement or repair of the unit at the discretion of Intellitronix.

RETURN POLICY PROCEDURES

Return Policy Instructions

1. Download the Intellitronix Return/Repair Form and fill in the information on the form about the product.
2. Place the product being returned in the original packaging that it came in and include a copy of the completed Intellitronix Return/Repair Form.
3. All packages must be accompanied with an RMA Number.

Please call Technical Support at +1 440-359-7200 to receive an RMA Number.

4. Mail the product being returned with the completed Return/Repair Form and a copy of the original sales invoice.

Request for Product Refund

1. All returns for a refund must have a completed Intellitronix Return/Repair Form included in the package with the returned product.
2. If the return is for a product that is not defective a 20% restocking fee will be charged. The product must be in the same pristine condition that it was sent to you.
3. Proof of purchase is required. Please include a copy of the original sales order with the returned product.
4. All product must be returned undamaged and in working order in the original packaging including plexiglass, sending units, mounting hardware, or you will be subject to additional charges for product and accessories not returned.
5. All refunds will be reviewed by the Accounting Office.